


ALL GEARED ROLL TURNING LATHE

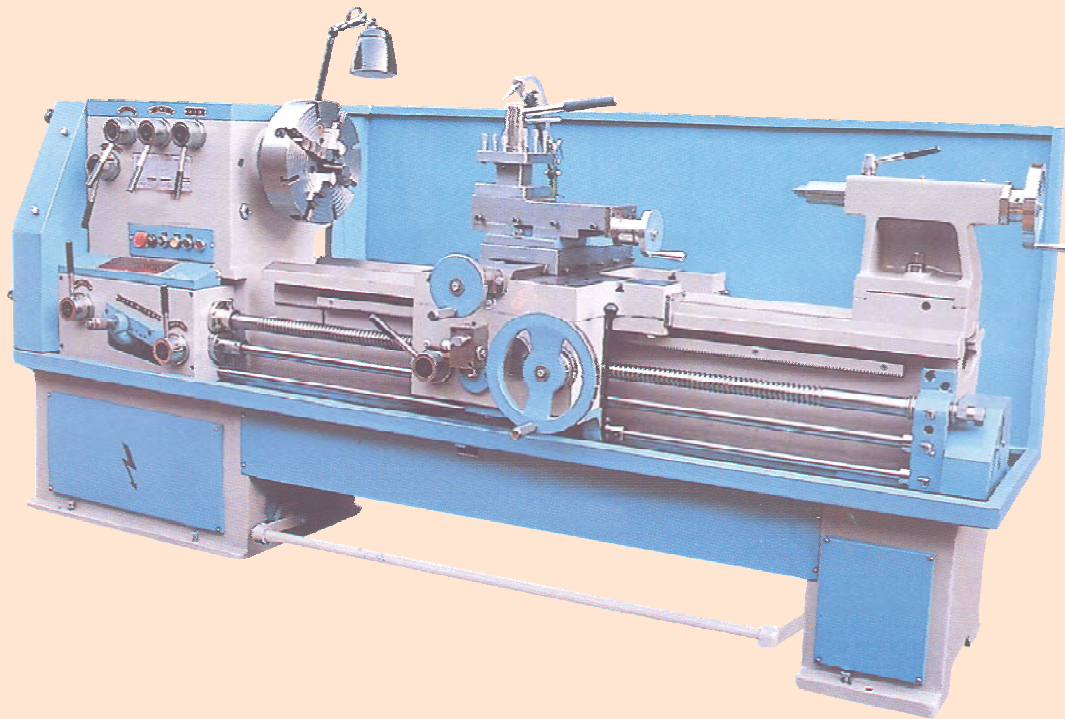

SPECIFICATIONS

Model	RTL-300	RTL-400	RTL-450
Length of Bed	6½', 8½', 10½', 12', 14'	8½', 10½', 12', 14', 16', 18', 20'	10½', 12', 14', 16', 18', 20'
Width of Bed	375 mm	460 mm	510 mm
Height of Centre	300 mm	400 mm	450 mm
Distance Between Centres	1000 mm, 1500 mm, 2000 mm 2500 mm, 3000 mm	1500 mm, 2000 mm, 2500 mm, 3000 mm, 3500 mm, 4000 mm, 4500 mm	2000 mm, 2500 mm, 3000 mm, 3500 mm, 4000 mm, 4500 mm
Swing Over Bed	600 mm	800 mm	900 mm
Swing Over Cross Slide	325 mm	530 mm	630 mm
Swing in Gap	865 mm	1200 mm	1300 mm
Spindle Speeds	8	9	9
Optional	16	18	18
Range of Spindle Speeds	30-720 RPM	30-720 RPM	30-720 RPM
Spindle Bore	62 mm	90 mm	105 mm
Metric Threads	1-14 mm	1-14 mm	1-14 mm
Whitworth Threads	2-30 TPI	2-30 TPI	2-30 TPI
Lead Screw Pitch	2 TPI	2 TPI	2 TPI
No. of Feeds	30	30	30
Tailstock Sleeve Taper	MT-4	MT-5	MT-5
Tailstock Spindle Diameter	62 mm	75 mm	80 mm
Power Required	3 HP	5 HP	7.5 HP

STANDARD ACCESSORIES : Quick Change Gear Box, Centres, Thread Dial Indicator, Follow Rest, Chuck Plate, 4 Way Tool Post, Tool Kit, Electric Motor with complete Control Panel.

➤ We are constantly striving to improve our products and therefore reserve the right to change design, material and specifications without previous notice.

Macstar Machine Tools Pvt. Ltd.

E-Mail: del@macstarindia.com

Website: www.macstarindia.com

WORKSHOP MACHINERY