



CONE PULLEY CENTRE LATHE

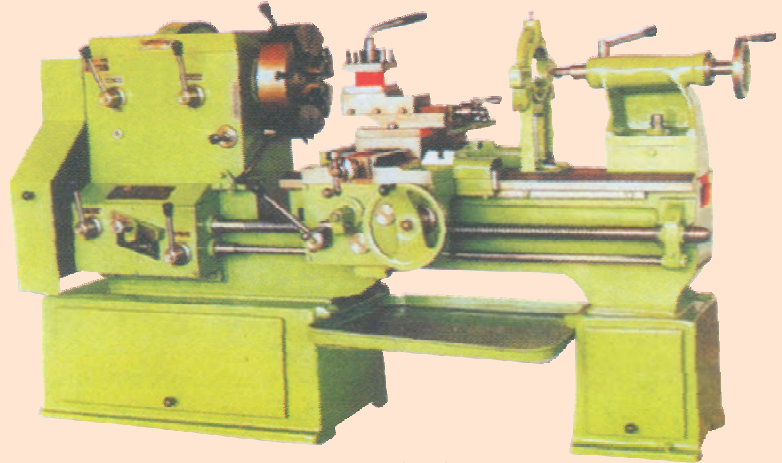

CPCL-1950

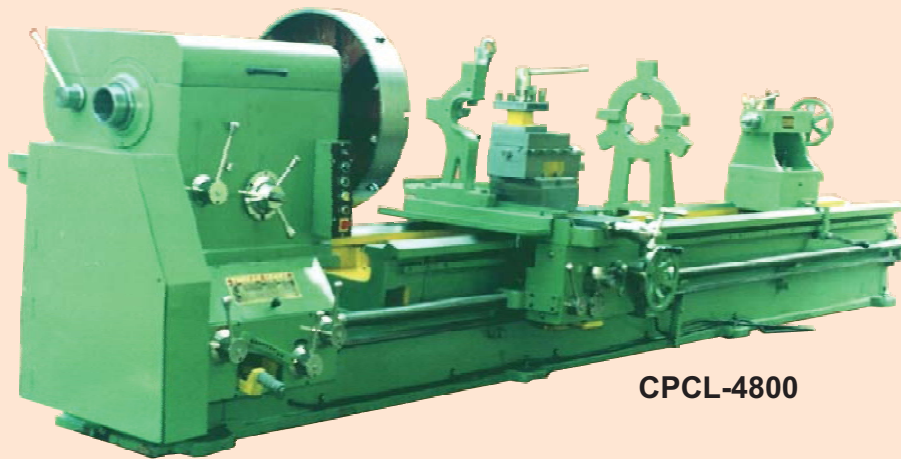

CPCL-4800

SPECIFICATIONS

Model	CPCL-1350	CPCL-1800	CPCL-1950	CPCL-2400	CPCL-3000	CPCL-3600	CPCL-4800
Length of Bed	4½ ft	6 ft	6½ ft	8 ft	10 ft	12 ft	16 ft
Width of Bed	12"	14"	14"	16"	18"	20"	22"
Height of Centre	9"	12"	12"	14"	16"	18"	20"
Swing in Gap Dia	28"	35"	35"	41"	47"	52"	58"
Width of Gap	10"	12"	12"	16"	18½"	20½"	22"
Swing Over Carriage	12"	19"	19"	22"	24"	28"	30"
Admit Between Centre	26"	36"	42"	58"	78"	96"	132"
Spindle Hollow	2⅛"	2⅝"	2⅝"	3⅛"	3⅝"	4⅛"	4⅝"
Spindle Speed	6	6	6	6	6	6	6
Lead Screw Dia	1½"	1⅝"	1⅝"	1¾"	2⅛"	2⅛"	2½"
Lead Screw Pitch	2 TPI	2 TPI	2 TPI	2 TPI	2 TPI	2 TPI	2 TPI
Power Required	2 HP	2 HP	2 HP	3 HP	3 HP	5 HP	7.5 HP

STANDARD ACCESSORIES : Face Plate, Chuck Plate, Steady Rest, Follow Rest, Dead Centre, Tool Kit.

EXTRA ACCESSORIES : Electricals.

➤ We are constantly striving to improve our products and therefore reserve the right to change design, material and specifications without previous notice.

Macstar Machine Tools Pvt. Ltd.