




UNDER CRANK SHEARING MACHINE

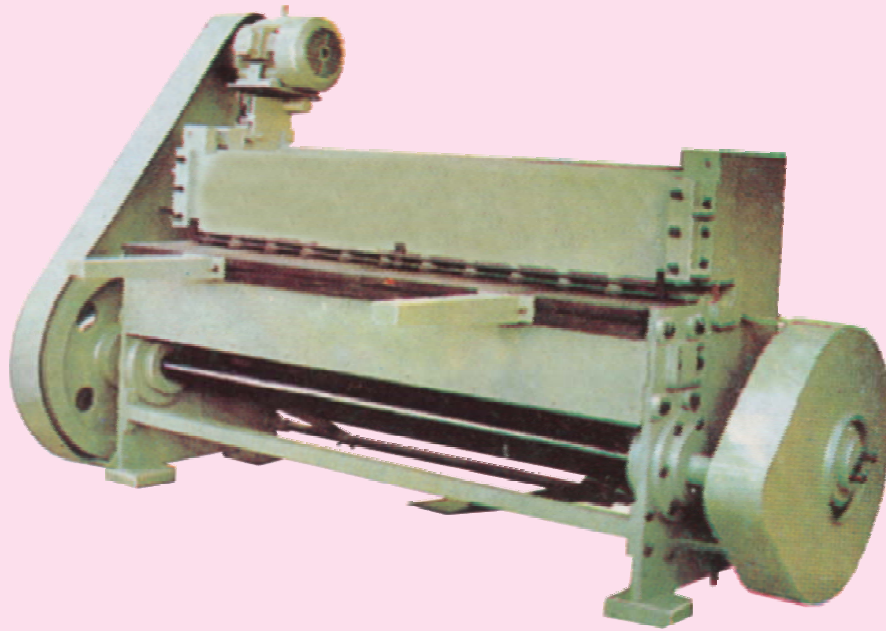

SPECIFICATIONS

Model	UCSM - 5002	UCSM - 6002	UCSM - 8002	UCSM - 5003	UCSM - 6003
Max. Shearing Length	1270 mm	1525 mm	2030 mm	1270 mm	1525 mm
Max. Sheet Thickness	2 mm	2 mm	2 mm	3 mm	3 mm
Depth of Throat	50 mm	50 mm	50 mm	62 mm	62 mm
Stroke/ Minute	45	45	45	45	45
Table Height (Approx.)	775 mm	775 mm	775 mm	900 mm	900 mm
Table Width	325 mm	325 mm	325 mm	430 mm	430 mm
Front Gauge	500 mm	500 mm	500 mm	500 mm	500 mm
Rear Gauge	600 mm	600 mm	600 mm	600 mm	600 mm
Power Required	3 HP	3 HP	5 HP	5 HP	5 HP
Model	UCSM - 8003	UCSM - 5004	UCSM - 6004	UCSM - 8004	UCSM - 1004
Max. Shearing Length	2030 mm	1270 mm	1525 mm	2030 mm	2540 mm
Max. Sheet Thickness	3 mm	4 mm	4 mm	4 mm	4 mm
Depth of Throat	62 mm	62 mm	62 mm	62 mm	62 mm
Stroke/ Minute	45	45	45	45	45
Table Height (Approx.)	900 mm	900 mm	900 mm	900 mm	900 mm
Table Width	430 mm	430 mm	430 mm	430 mm	430 mm
Front Gauge	500 mm	500 mm	500 mm	500 mm	500 mm
Rear Gauge	600 mm	600 mm	600 mm	600 mm	600 mm
Power Required	5 HP	7.5 HP	7.5 HP	7.5 HP	10 HP

STANDARD ACCESSORIES : Tool Kit.

EXTRA ACCESSORIES : Electricals.

➤ We are constantly striving to improve our products and therefore reserve the right to change design, material and specifications without previous notice.

Macstar Machine Tools Pvt. Ltd.

E-Mail: del@macstarindia.com

Website: www.macstarindia.com